

D

C

B


A

D

C

B

A

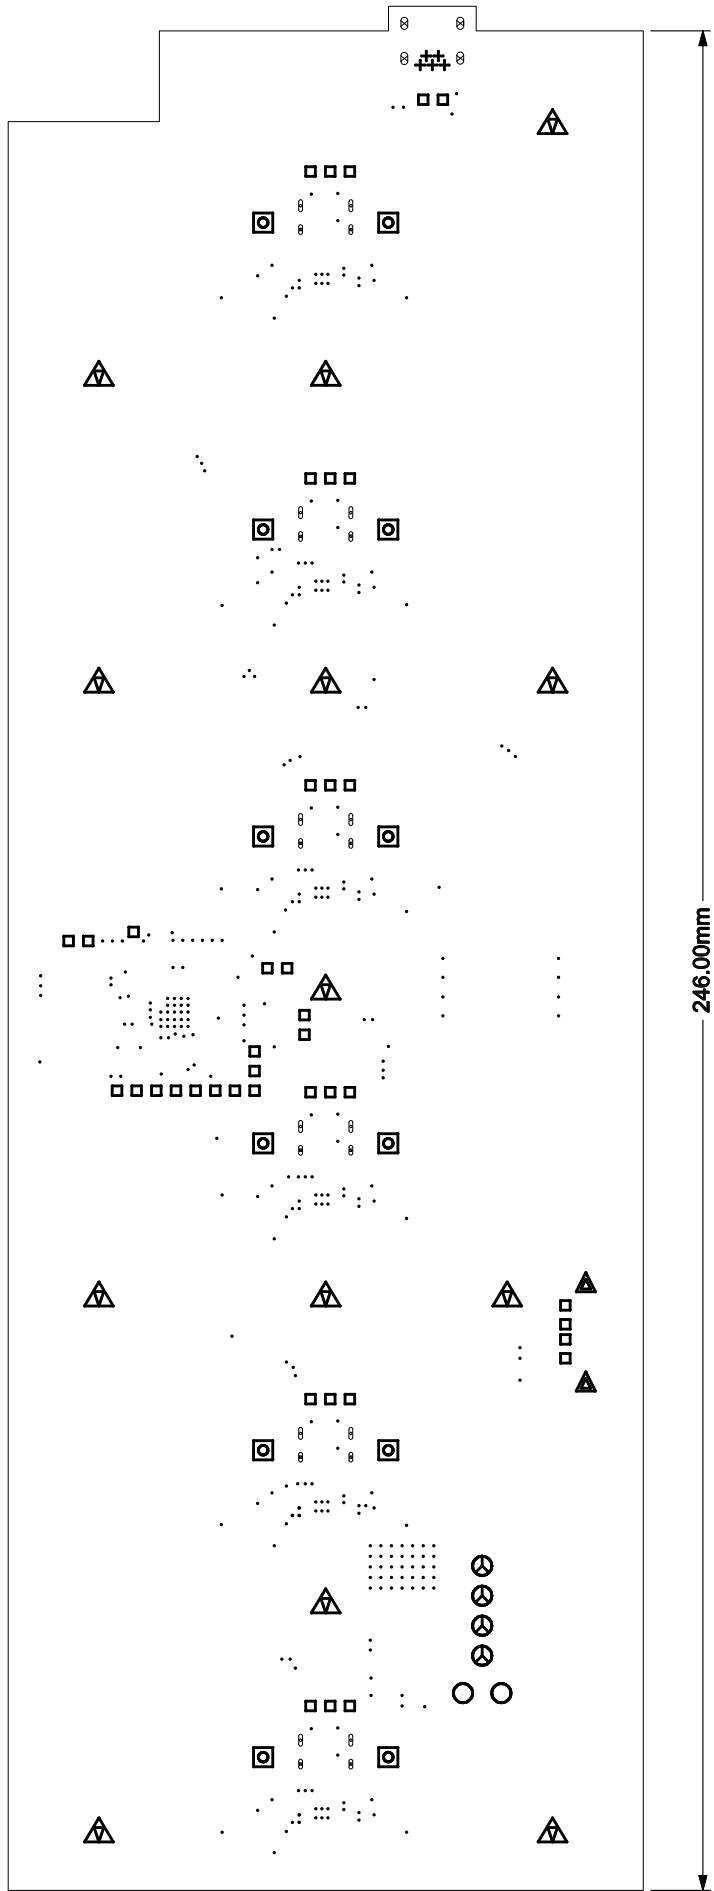

1.3
0.5

1.6
0.5

1.6
0.9

TROUS METALLISES			NM
N°	REPERE	NB	
1	· 0.3 12	358	
2	□ 0.3 12	12	
3	○ 0.3 12	12	
4	+ 0.8 32	5	
5	⊗ 0.8 4	4	
6	□ 1 40	41	
7	○ 1.2 48	2	
8	⊗ 1.7 67	4	
9	⊗ 2.2 87	12	
10	△ 2.3 91	2	
11	△ 3.2 126	13	

EMPLIAGE DES COUCHES

Ep 500 μ	1		ELEMENTS
	2		GND
Ep 500 μ	3		VCC
	4		SOUDURES

MATERIAU		VERRE EPOXY FR4
EPAISSEUR		1.6 mm ±10 %
EP. CU DE BASE	EXT	17.5 μm
	INT	35 μm
NB COUCHES		4

REVETEMENT				
SN PB	REFONDU SELECTIF		SN HAL	
CONNECTEUR X DOIGTS			Ni 5 Au 0.5 min ELECTRO	
CHANFREIN PCI				
VERNIS :			EL/SO	
SERIGRAPHIE			COMPOSANTS	
			SOUDURES	
CLASSE	FIL	ISO	EXT	INT
3	12	12		<div></div>
4	8	8		
5	6	6	<div></div>	
6	5	5		

GEMS-DES	10-10-2010	A	B322
DESSINE	DATE	INDICE	NUMERO
ECH : 1	GEMS-DES Z.A.E LINAS 5 RUE ETTORE BUGATTI 91310 LINAS MONTLHERY TEL:01-69-63-25-80		
		KALLYSTA	
CARTE SAS6 V1.0			B322
A3	PLAN DE PERCAGE		PLANCHE 1/1