


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HM	00		C	REV ECO-12-012703	12JUL12	JB	JG

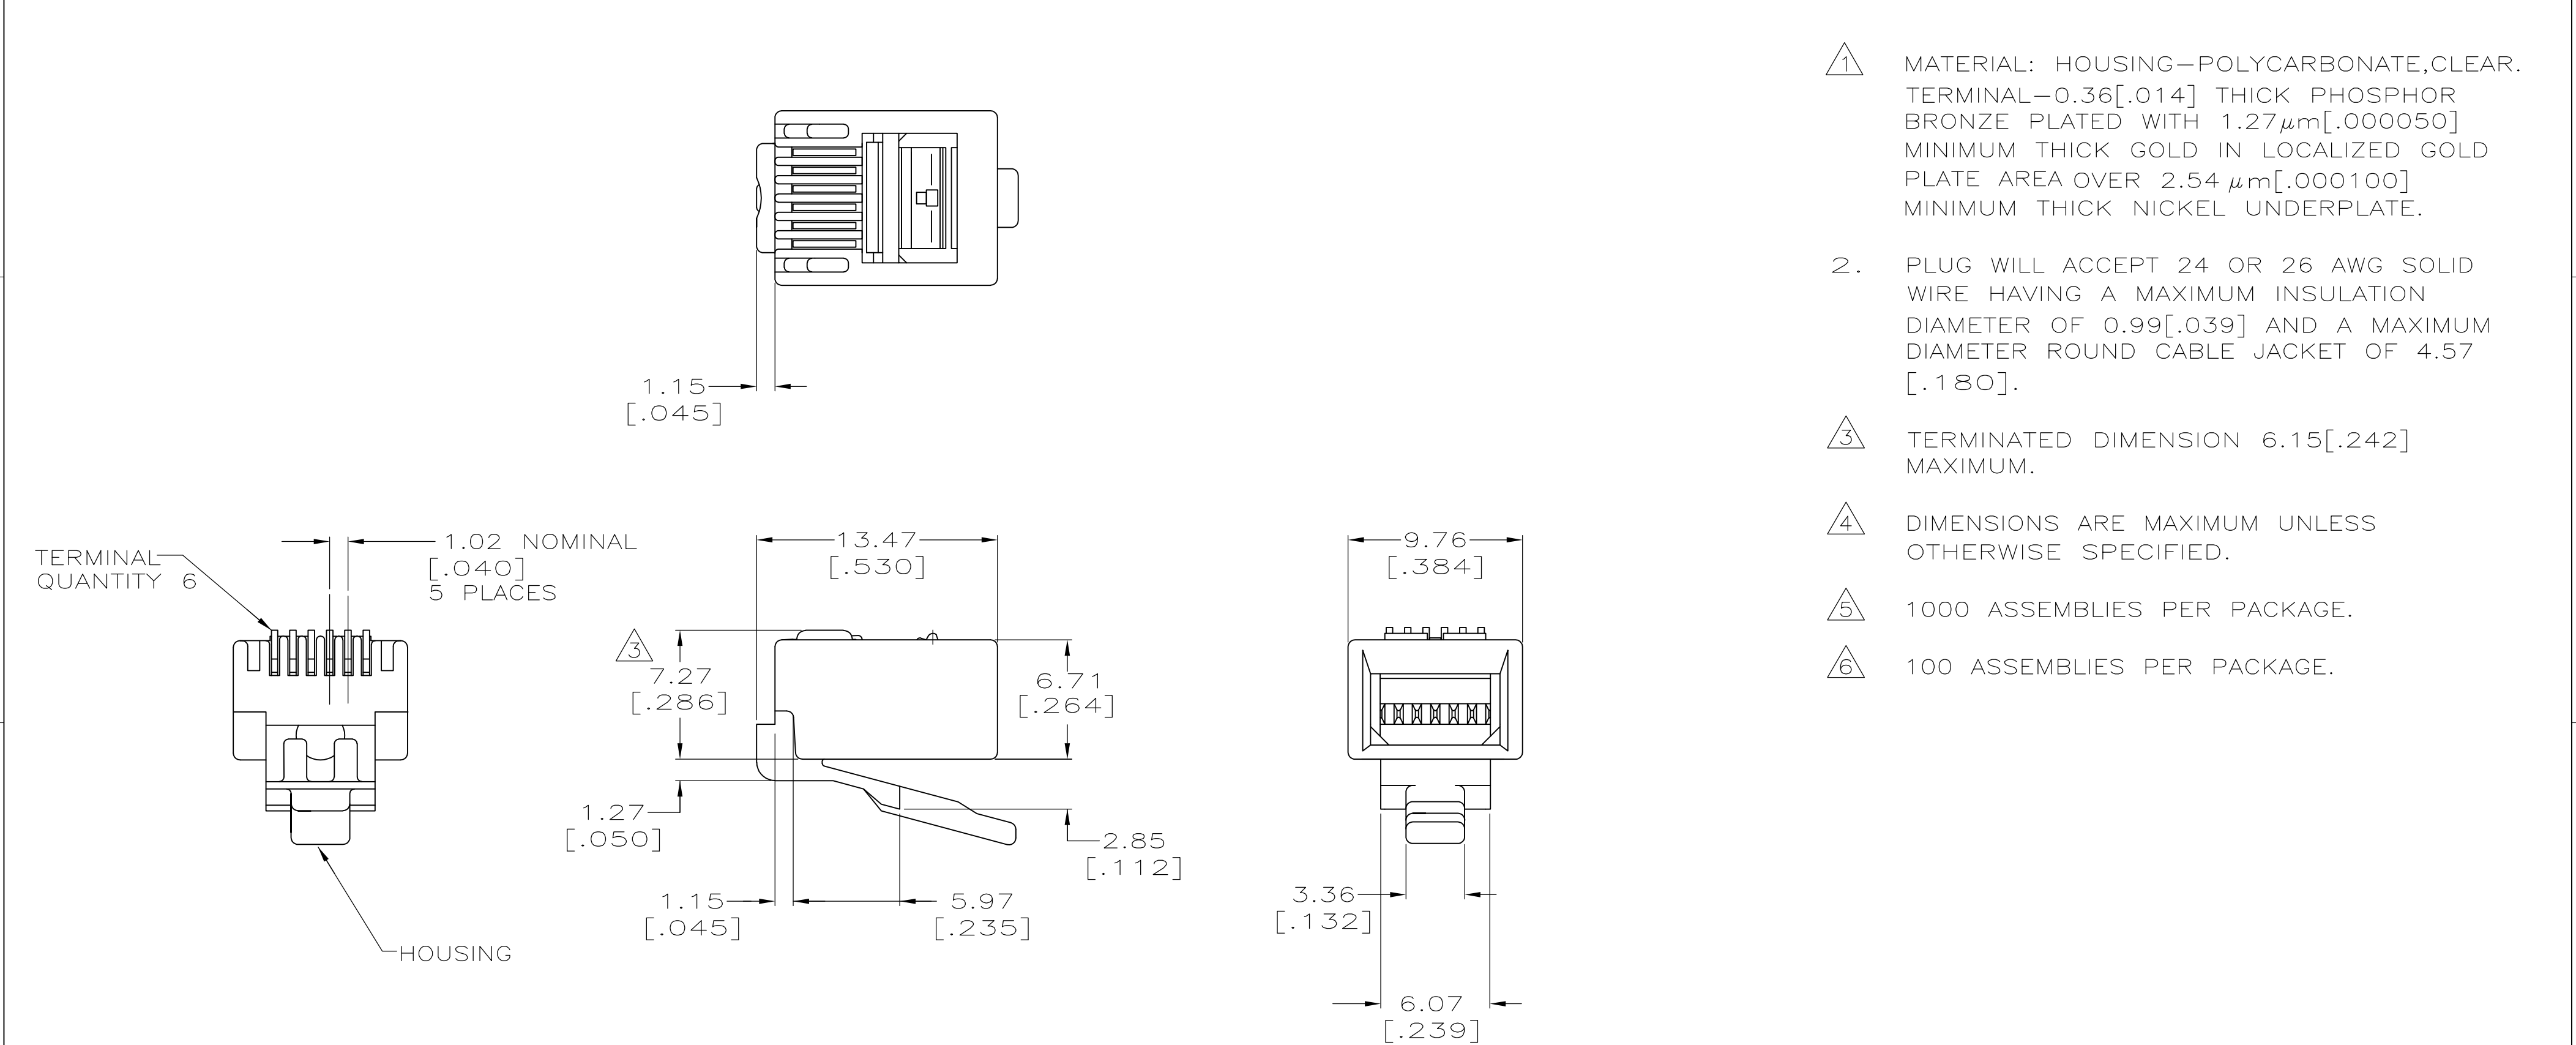

- 1 MATERIAL: HOUSING—POLYCARBONATE,CLEAR.
TERMINAL—0.36[.014] THICK PHOSPHOR
BRONZE PLATED WITH 1.27 μ m[.000050]
MINIMUM THICK GOLD IN LOCALIZED GOLD
PLATE AREA OVER 2.54 μ m[.000100]
MINIMUM THICK NICKEL UNDERPLATE.
2. PLUG WILL ACCEPT 24 OR 26 AWG SOLID
WIRE HAVING A MAXIMUM INSULATION
DIAMETER OF 0.99[.039] AND A MAXIMUM
DIAMETER ROUND CABLE JACKET OF 4.57
[.180].
- 3 TERMINATED DIMENSION 6.15[.242]
MAXIMUM.
- 4 DIMENSIONS ARE MAXIMUM UNLESS
OTHERWISE SPECIFIED.
- 5 1000 ASSEMBLIES PER PACKAGE.
- 6 100 ASSEMBLIES PER PACKAGE.

6	5-569032-3
5	5-569032-2
PACKAGED	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. HALL 29FEB2008	TE Connectivity			
DIMENSIONS: MM [INCHES]		CHK B. MCNEILL 29FEB2008				
		APVD B. MCNEILL 29FEB2008	NAME			
		PRODUCT SPEC	MODULAR PLUG ASSEMBLY, 6 POSITION, ROUND CABLE, SOLID WIRE			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		108-1163	SIZE		DRAWING NO	
0 PLC ± - 4		APPLICATION SPEC	114-6016		RESTRICTED TO	
1 PLC ± -		WEIGHT	A2 00779		C=569032	
2 PLC ± -		CUSTOMER DRAWING	SCALE 4:1		SHEET 1 of 1	
3 PLC ± -					REV C	
4 PLC ± -						
ANGLES ± -						
FINISH						
- 1						