
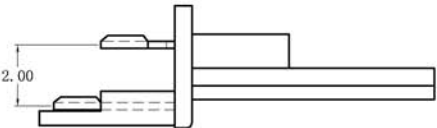
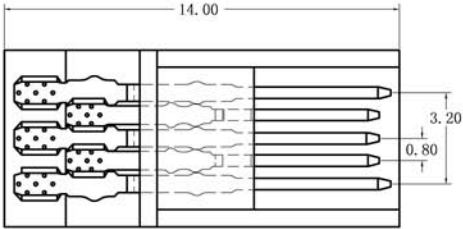
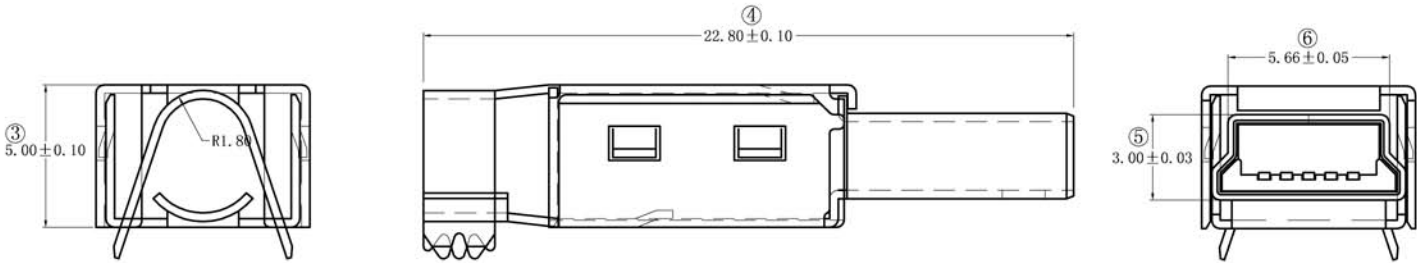


REV.	DATE	MODIFICATION	APPROVER
Ⓐ	07.6.15	NEW	Vicky
Ⓑ			
Ⓒ			

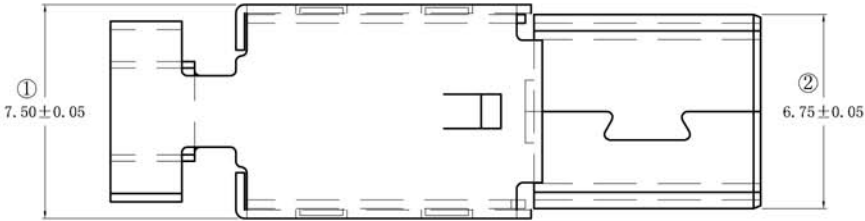

前五后五

Specifications:

Electrical:
Contact Resistance: 30 milliohms MAX
Dielectric Withstanding Voltage: 500 V AC AT Sea Level
Insulation Resistance: 1000 MEGA ohms MIN
Material:
Housing:High Temperature Thermoplastics, UL 94V-0
Contact:Copper Alloy
Shell: SPCC-SD
Finish:
Contact: Plated Gold in Mating Area;
Tin On Solder Tails
Shell: Nickel/ Plating
Dimensions without marking tolerance, please refer to±0.01

GENERAL TOLERANCE				UNITS	NAME	ATOM TECHNOLOGY CO., LTD.			
SELECT				mm					
ON	TOL	1	2	3	MAT'L	PART NO:	TITLE:		
X.XXX	±	0.10	0.05	0.15	NONE	ATOM010010060081	MINI USB 5P MALE 前五后五 三件套 普通型		
X.XX	±	0.15	0.13	0.25	FINISH	APPD: Vicky	DWG NO. MINI USB		
X.X	±	0.20	0.25	0.5	NONE	CHKD: Amy			
X.	±	0.30	0.38	1.00	Q'TY	DR: Jasmine			
ANGLE	±				NONE				
								SCALE	SHEET
								1:1	1 OF 1
									REV
									A