
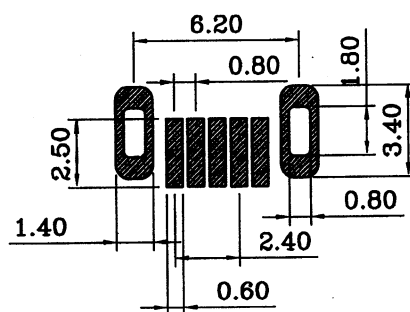
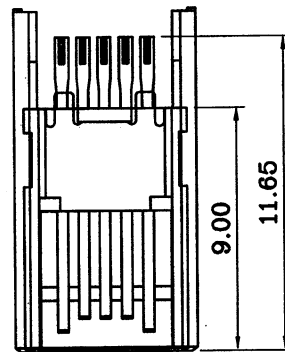


MATERIAL SPECIFICATION:

1. HOUSING:LCP PLASTIC(UL94V-0)
2. CONTACT:PHOSPHOR BRONZE
3. SHELL:BRASS

ELECTRICAL PERFORMANCE

1. RATED VOLTAGE(MAX.):30V AC/DC
2. RATED CURRENT(MAX.):1.0A AC/DC
3. DIELECTRIC STRENGTH:100V AC FOR 1 MINUTE
BETWEEN ADJACENT TERMINAL, NO BREAKDOWN
4. INSULATION RESISTANCE:100 MEGOHMS MIN. 100V
DC FOR 1 MINUTE BETWEEN ADJACENT TERMINAL
5. CONTACT RESISTANCE:50 MILLIOHM MAX.
6. OPERATING TEMPERATURE:-25° to +80°

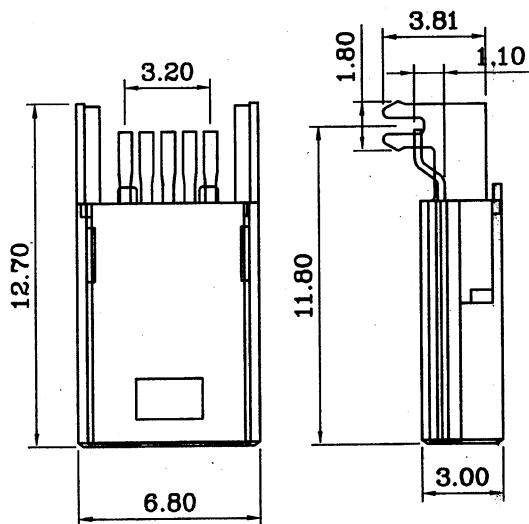

RECOMMENDED P.C.B LAYOUT

H	5				DRAWING: 万 军	GENERAL TOLERANCE .X:=±0.3 .X':=±2° .XX:=±0.20 .XX':=±1° .XXX:=±0.100 .XXX':=±0.5°		DESCRIPTION: Mini USB Male 5Pin SMT Type	
	4								
	3				CHECKED: Jeliy Zhang	UNIT: MM	PROJECTION:	PART NO: DRAWING NO:	
	2					SCALE: 1/1	⊕		
	1				APPROVAL:	SHEET: 1/1	⊕	REV: 1.0	SIZE: A4
	NO.	DATE	DESCRIPTION	APPROVAL					