


Housing: Thermoplastics, UL94V-0
 Contact: Copper Alloy
 Shell: Copper Alloy / Steel
 Voltage Current Rating: 1 AMP. 30V AC
 Insulation Resistance: 100M Ω Min.
 Contact Resistance: 50 m Ω Max.
 Dielectric Withstanding Voltage: 100V AC
 Temperature Range: -50 $^{\circ}$ C to +85 $^{\circ}$ C

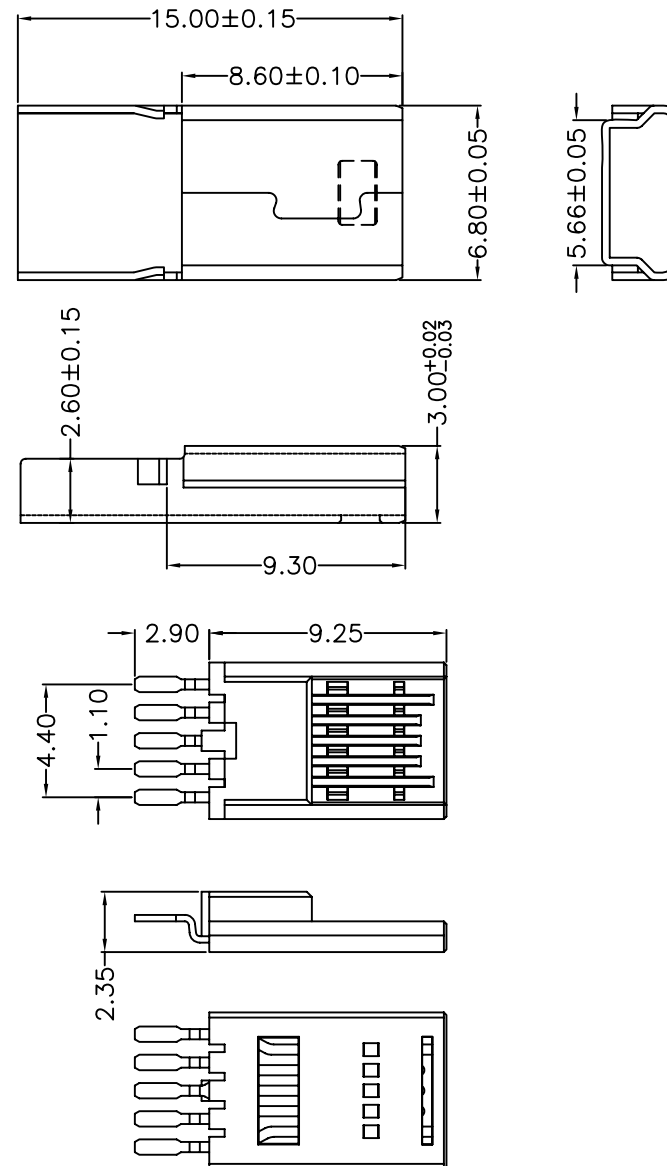

				單位 UNIT	MM	*: Inspection Item			
				比例 SCALE	1:1	CP: Cpk/Cpk and SPC Control Item		圖號 Dwg No.	MUB BM SD-002
				張數 SHEET	1/1	TOLERANCE UNLESS OTHERWISE SPECIFIED		名稱	MINI USB 5M前五后五短型
				製圖 DRAWN		.X±0.25	X'±3'	TITLE	
				版本 REV.	NEW	.XX±0.20	.X'±1'	角法 PROJ.	成品圖
				設變內容 MODIFICATION	07.05.19	.XXX±0.10	.XX±		
				日期 DATE	修改 DRAW	核准 APPROVE	審核 CHECKED		