

| 1   |          |                             | 2          |            | 3    |  |
|-----|----------|-----------------------------|------------|------------|------|--|
| NO. | PART NO. | NAME                        | MATERIAL   | COLOR      | QTY  |  |
| 1   |          | HOUSING                     | SEE NOTE3. | SEE NOTE3. | 1PCS |  |
| 2   |          | SHIELD                      |            |            | 1PCS |  |
| 3   |          | LATCH                       |            |            | 2PCS |  |
| 4   |          | I-Pod-30Pin 仿原装壳 TERMINAL-R |            | 15PCS      |      |  |
| 5   |          | I-Pod-30Pin 仿原装壳 TERMINAL-L |            | 15PCS      |      |  |

| 4                                |  | 5            |  |
|----------------------------------|--|--------------|--|
| I-Pod-30Pin 仿原装壳 ASSEMBLY新舊料號對照表 |  |              |  |
| 新                                |  | 舊            |  |
| AM3021000000                     |  | M3PD-IP0D53M |  |




| 6   |           |  | 7           |      | 8        |  |
|-----|-----------|--|-------------|------|----------|--|
| LET | REVISIONS |  | DESCRIPTION | DATE | APPROVED |  |
| △   |           |  |             |      |          |  |
| △   |           |  |             |      |          |  |

NOTE:

- ELECTRICAL  
CURRENT RATING:0.5A  
DIELECTRIC WITHSTANDING VOLTAGE:300VAC  
INSULATION RESISTANCE:100MΩ /1000VDC  
CONTACT RESISTANCE:80mΩ
- ENVIRONMENTAL  
OPERATING TEMPERATURE:-15℃ TO 85℃  
STORAGE TEMPERATURE:-30℃ TO 85℃
- PART NO.


A M3021 X X 0 X 00  
0: 膠芯LCP 黑色  
1: 膠芯PA66+30%G.F.黑色  
2: 膠芯PA66+30%G.F.白色

0: 端子C5210 電鍍Ni/Sn/Au,Au 2~3u";  
1: 端子C5210 電鍍電鍍Ni/Sn/Au,5u" Au;  
2: 端子C5210 電鍍電鍍Ni/Sn/Au,10u" Au;  
3: 端子C5210 電鍍電鍍Ni/Sn/Au,30u" Au;?  
0: 卡勾SUS301 , Ni50~80u", 鍍殼SUS301;  
1: 卡勾SUS301 , Ni50~80u"; 鍍殼SUS301 , Ni 50u";

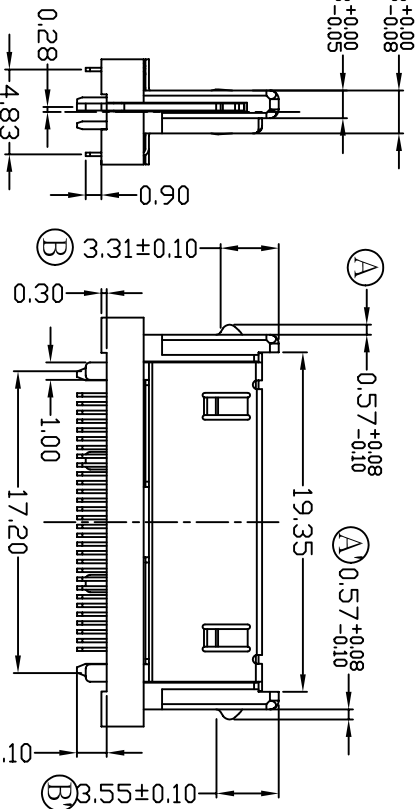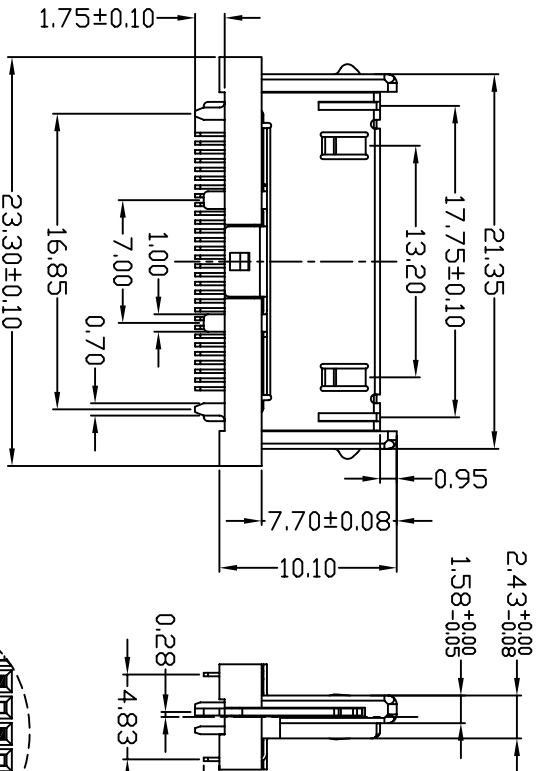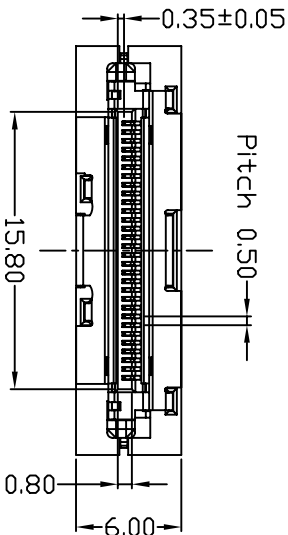


NOTE:

IA-A'≤0.08  
IB-B'≤0.08



DETAIL-A SCALE 3:1

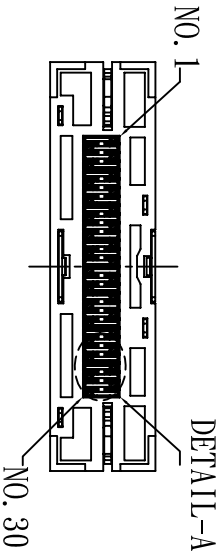

| TOLERANCE |       |       |       |       |     |
|-----------|-------|-------|-------|-------|-----|
| X.        | X.X   | X.XX  | X.XXX | X.*   |     |
| A         | ±0.20 | ±0.10 | ±0.05 | ±0.03 | ±1° |
| B         | ±0.50 | ±0.20 | ±0.10 | ±0.05 | ±2° |
| C         | ±0.80 | ±0.40 | ±0.20 | ±0.10 | ±3° |



SHENZHEN SHENGBO TECHNOLOGY CO.,LTD

|           |        |             |            |
|-----------|--------|-------------|------------|
| MATERIAL: | UNIT:  | THIRD ANGLE | PART NO.   |
| SURFACES: | SCALE: |             | IP0D-M-015 |
| COLOR:    | REV:   |             |            |